

Test Report issued under the responsibility of:



**TEST REPORT
IEC TR 62778**

**Application of IEC 62471 for the assessment of blue light hazard to
light sources and luminaires**

Report Number: 6104370.50P

Date of issue: 2021-05-25

Total number of pages: 54

**Name of Testing Laboratory
preparing the Report**: DEKRA Testing and Certification (Shanghai) Ltd.
3/F, #250, Jiangchangsan Road building 16 Headquater
Economy Park Shibe Hi-Tech Park, Zhabei District, Shanghai,
P.R.C 200436

Applicant's name: Lumileds Commercial (Shanghai) Co., Ltd

Address: No. 9, Lane 888, Tianlin Road, Shanghai, China

Test specification:

Standard: IEC TR 62778:2014 (Second Edition)

Test procedure: Type test

Non-standard test method: N/A

Test Report Form No: IEC62778A

Test Report Form(s) Originator: TÜV SÜD Product Service GmbH

Master TRF: Dated 2016-02

**Copyright © 2016 IEC System of Conformity Assessment Schemes for Electrotechnical
Equipment and Components (IECEE System). All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory
and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

General disclaimer:

The test results presented in this report relate only to the object tested.

This report shall not be reproduced, except in full, without the written approval of the Issuing CB Testing Laboratory. The authenticity of this Test Report and its contents can be verified by contacting the NCB, responsible for this Test Report.

The purpose of this report is only for export activities.

Test item description :	LUXEON 5050
Trade Mark	LUMILEDS
Manufacturer :	Lumileds Commercial (Shanghai) Co., Ltd No. 9, Lane 888, Tianlin Road, Shanghai, China
Model/Type reference :	LUXEON 5050 series Detailed lists refer to Appendix 2: Model List
Ratings :	Max voltage: 27 Vdc, Max current: 240 mA Detailed information please refer to Appendix 2: Model List.

Responsible Testing Laboratory (as applicable), testing procedure and testing location(s):

<input checked="" type="checkbox"/> CB Testing Laboratory:	DEKRA Testing and Certification (Shanghai) Ltd.	
Testing location/ address	3/F, #250, Jiangchangsan Road building 16 Headquater Economy Park Shibe Hi-Tech Park, Zhabei District, Shanghai, P.R.C 200436	
<input type="checkbox"/> Associated CB Testing Laboratory:		
Testing location/ address		
Tested by (name, function, signature)	Nancy Wang	<i>Nancy Wang</i>
Approved by (name, function, signature) ...	Hanson Zhang	<i>Hanson</i>
<input type="checkbox"/> Testing procedure: CTF Stage 1:		
Testing location/ address		
Tested by (name, function, signature)		
Approved by (name, function, signature)		
<input type="checkbox"/> Testing procedure: CTF Stage 2:		
Testing location/ address		
Tested by (name + signature)		
Witnessed by (name, function, signature)		
Approved by (name, function, signature)		
<input type="checkbox"/> Testing procedure: CTF Stage 3:		
<input type="checkbox"/> Testing procedure: CTF Stage 4:		
Testing location/ address		
Tested by (name, function, signature)		

Witnessed by (name, function, signature)		
Approved by (name, function, signature)		
Supervised by (name, function, signature)		

List of Attachments (including a total number of pages in each attachment):

- Appendix 1: Photo Documentation
- Appendix 2: Model List
- Appendix 3: Relative Spectrum Of Tested Sample(s)
- Appendix 4: Table 6.1Based On IEC 62471:2006
- Appendix 5: Table 6.1 Based On EN62471:2008, Attachment To IEC 62471 European Group Differences And National Differences
- Appendix 6: Blue Light Hazard-forward Current Relationship (Non-mandatory Information)

Summary of testing:

Tests performed (name of test and test clause):	Testing location:
<p>These tests fulfil the requirements of standard ISO/IEC 17025.</p> <p>When determining the test conclusion, the Measurement Uncertainty of test has been considered.</p> <p>The tested sample of L150-5770502400000 L150-5070502400000 L150-4070502400000</p> <p>from LUXEON 5050 series list at appendix 2</p> <p>Have been tested according to the IEC 62471(first edition, 2006-07) at 200mm and been classified as RG 2 at maximum current 240mA.</p> <p>Have been tested according to the EN 62471:2008 at 200mm and been classified as RG 2 at maximum current 240mA.</p> <p>Have been tested according to the IEC/TR62778:2014 and been classified as RG 2 for blue light hazard at maximum current 240mA.</p>	<p>DEKRA Testing and Certification (Shanghai) Ltd. 3/F, #250, Jiangchansan Road building 16 Headquater Economy Park Shabei Hi-Tech Park, Zhabei District, Shanghai, P.R.C 200436</p>

The sample of
L150-5770502400000
was tested at 60mA, 120mA, 180mA and 240mA.
Current at RG1 to RG2 boundary was deducted to
be 96mA. (See appendix 6 for detail).

The sample of
L150-5070502400000
was tested at 60mA, 120mA, 180mA and 240mA.
Current at RG1 to RG2 boundary was deducted to
be 99mA. (See appendix 6 for detail).

The sample of
L150-4070502400000
was tested at 60mA, 120mA, 180mA and 240mA.
Current at RG1 to RG2 boundary was deducted to
be 131mA. (See appendix 6 for detail).

Summary of compliance with National Differences (List of countries addressed):EN Standards

EN 62471:2008

 The product fulfils the requirements

Copy of marking plate:

The artwork below may be only a draft. The use of certification marks on a product must be authorized by the respective NCBs that own these marks.

N/A

Test item particulars : See below	
Product evaluated : <input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire	
Rated voltage (V)..... : Max: 27 Vdc	
Rated current (mA)..... : Max:240 mA	
Rated CCT (K) : 2200K / 2500K / 2700K / 3000K / 4000K / 5000K / 5700K Details information please refer to Appendix 2: Model List.	
Rated Luminance (Mcd/m²)..... : --	
Component report data used : <input checked="" type="checkbox"/> Not applicable <input type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp Report number: --	
Possible test case verdicts: - test case does not apply to the test object..... : N/A - test object does meet the requirement..... : P (Pass) - test object does not meet the requirement..... : F (Fail)	
Testing : --	
Date of receipt of test item..... : 2021-05-10	
Date (s) of performance of tests : 2021-05-25	
General remarks: "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report.	
Throughout this report a <input checked="" type="checkbox"/> comma / <input type="checkbox"/> point is used as the decimal separator.	
The product complied with the following standards: <input checked="" type="checkbox"/> IEC 62471:2006 <input checked="" type="checkbox"/> EN 62471:2008 <input type="checkbox"/> IEC/TR 62471-2:2009 <input checked="" type="checkbox"/> IEC/TR 62778:2014	
Decision rules applied Procedure 2 "Accuracy Method" as stated in the IEC Guide 115:2007.	

Manufacturer's Declaration per sub-clause 4.2.5 of IEC62778A:

The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided.....

- Yes
 Not applicable

When differences exist; they shall be identified in the General product information section.

Name and address of factory (ies)..... : Lumileds Commercial (Shanghai) Co., Ltd
No. 9, Lane 888, Tianlin Road, Shanghai, China

General product information:

L150-5770502400000, with ANSI bin 5700K, is part of the LUXEON 5050 product family. The sample measured, L150-5770502400000 has the highest typical flux, highest typical device luminance level and highest CCT within the listed LUXEON 5050 product family. The present classification is thus valid (worst case) for all LUXEON 5050 with part number L150-AABB50CCxxxx where AA represents nominal ANSI CCT bins could be equal to 5700K or lower, BB represents CRI could be HG and from 70 to 90 (see TR IEC62778). CC represents voltage, could be 6V and 24V. Note that for 6V samples, the current is 4 times as much as that of 24V samples for same flux output and thereby the same risk. See the appendix 2 below for an explanation of the type designation.

The samples of L150-5770502400000, L150-5070502400000 and L150-4070502400000 were tested at 60mA, 120mA, 180mA and 240mA. Current RG1 to RG2 boundary was deducted to be 96mA for L150-5770502400000, 99mA for L150-5070502400000, 131mA for L150-4070502400000 (See appendix 6 for detail.) The threshold current RG1 to RG2 boundary for different CCT is summarized into the table in Appendix 6.

The products considered as worst case which should be evaluated at 200mm.

The sample of L150-5770502400000 was tested at 200mm from the light source. CCT of spectral irradiance was found at 5917 K.

The sample of L150-5070502400000 was tested at 200mm from the light source. CCT of spectral irradiance was found at 5214 K.

The sample of L150-4070502400000 was tested at 200mm from the light source. CCT of spectral irradiance was found at 4180 K.

Base on the Model list which listed on the appendix 2, The tested sample can be considered as
 typical product worst product

Which the results can be reference used for the other models.

Type test was performed according to IEC 62471:2006 procedure.

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict
7	MEASUREMENT INFORMATION FLOW		P
7.1	Basic flow		P
	'Law of conservation of luminance' applied		N/A
	Use of only true luminance/radiance values		P
	In case of luminaire: The light source is operated in the luminaire under similar conditions as when tested as a component		N/A
	In case E_{thr} value for RG2 was established the peak value was derived from angular light distribution		N/A
7.2	Conditions for the radiance measurement		P
	Standard condition applied (200mm distance, 0,011rad field of view)		P
	Non-standard condition applied		N/A
7.3	Special cases (I): Replacement by a lamp or LED module of another type		N/A
	Light source is a white light source		N/A
	Evaluation done based on highest luminance		N/A
	Evaluation done based on CCT value		N/A
7.4	Special cases (II): Arrays and clusters of primary light sources		N/A
	LED package is evaluated as : <input type="checkbox"/> RG0 unlimited <input type="checkbox"/> RG1 unlimited		N/A
	E_{thr} of LED package applies to array		N/A
8	RISK GROUP CLASSIFICATION		P
	Risk group achieved:		P
	-...Risk Group 0 unlimited		N/A
	-...Risk Group 1 unlimited		N/A
	- E_{thr} (lx) : - Distance to reach RG1 (mm) ::	Refer to the Supplementary information of TABLE:Spectroradiometric measurement as following	P

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
TABLE:Spectroradiometric measurement				
Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
Model number		L150-5770502400000		
Test voltage (V)		27 Vdc		—
Test current (mA)		240mA		—
Test frequency (Hz)		--		—
Ambient, t(°C)		25°C		—
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5917	
x/y colour coordinates			0,3232/ 0,3417	
Blue light hazard radiance	L _B	W/(m ² •sr ⁻¹)	2,45E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	2,33E+07	@11mrad
Illuminance	E	lx	7,47E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 950 lx Dmin= 561 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
TABLE:Spectroradiometric measurement				
Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
Model number		L150-5770502400000		
Test voltage (V)		--		--
Test current (mA)		180mA		--
Test frequency (Hz)		--		--
Ambient, t(°C)		25°C		--
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		--
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		--
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		--
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5917	
x/y colour coordinates			0,3232/ 0,3417	
Blue light hazard radiance	L _B	W/(m ² •sr ⁻¹)	1,80E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	1,88E+07	@11mrad
Illuminance	E	lx	6,04E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 1044 lx Dmin= 481 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
TABLE:Spectroradiometric measurement				
Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
Model number		L150-5770502400000		
Test voltage (V)		--		--
Test current (mA)		120mA		--
Test frequency (Hz)		--		--
Ambient, t(°C)		25°C		--
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		--
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		--
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		--
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5917	
x/y colour coordinates			0,3232/ 0,3417	
Blue light hazard radiance	L _B	W/(m ² •sr ⁻¹)	1,24E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	1,33E+07	@11mrad
Illuminance	E	lx	4,26E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 1074 lx Dmin= 398 mm				

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict

TABLE:Spectroradiometric measurement				
Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
	Model number	L150-5770502400000		
	Test voltage (V)	--		
	Test current (mA)	60mA		
	Test frequency (Hz)	--		
	Ambient, t(°C)	25°C		
	Measurement distance	<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		
	Source size	<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		
	Field of view	<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		
Item		Symb ol	Units	Result
Correlated colour temperature	CCT	K		5917
x/y colour coordinates				0,3232/ 0,3417
Blue light hazard radiance	L _B	W/(m ² •sr ⁻¹)		6,40E+03 @11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²		7,15E+06 @11mrad
Illuminance	E	lx		2,31E+03
Supplementary information: N/A				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
TABLE:Spectroradiometric measurement				
Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
Model number		L150-5070502400000		
Test voltage (V)		27 Vdc		—
Test current (mA)		240mA		—
Test frequency (Hz)		--		—
Ambient, t(°C)		25°C		—
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		—
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		—
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5214	
x/y colour coordinates			0,3393/ 0,3467	
Blue light hazard radiance	L _B	W/(m ² •sr ⁻¹)	2,20E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	2,24E+07	@11mrad
Illuminance	E	lx	4,78E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 1019 lx Dmin= 433 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire	
	Model number		L150-5070502400000	
	Test voltage (V)		--	--
	Test current (mA)		180mA	--
	Test frequency (Hz)		--	--
	Ambient, t(°C)		25°C	--
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	--
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :	--
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	--
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5161	
x/y colour coordinates			0,3408/ 0,3494	
Blue light hazard radiance	L_B	$W/(m^2 \cdot sr^1)$	1,73E+04	@11mrad
Blue light hazard irradiance	E_B	W/m^2	--	
Luminance	L	cd/m^2	1,94E+07	@11mrad
Illuminance	E	lx	3,91E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 1123 lx Dmin= 373 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
TABLE:Spectroradiometric measurement				
Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire		
Model number		L150-5070502400000		
Test voltage (V)		--		--
Test current (mA)		120mA		--
Test frequency (Hz)		--		--
Ambient, t(°C)		25°C		--
Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm		--
Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :		--
Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)		--
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	5152	
x/y colour coordinates			0,3419/ 0,3519	
Blue light hazard radiance	L _B	W/(m ² •sr ⁻¹)	1,20E+04	@11mrad
Blue light hazard irradiance	E _B	W/m ²	--	
Luminance	L	cd/m ²	1,39E+07	@11mrad
Illuminance	E	lx	2,78E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 1159 lx Dmin= 309 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire	
	Model number		L150-5070502400000	
	Test voltage (V)		--	
	Test current (mA)		60mA	
	Test frequency (Hz)		--	
	Ambient, t(°C)		25°C	
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :	
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	
Item		Symb ol	Units	Result
Correlated colour temperature		CCT	K	5088
x/y colour coordinates				0,3431/ 0,3551
Blue light hazard radiance		L _B	W/(m ² •sr ⁻¹)	6,18E+03
Blue light hazard irradiance		E _B	W/m ²	--
Luminance		L	cd/m ²	7,43E+06
Illuminance		E	lx	1,49E+03
Supplementary information: N/A				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire	
	Model number		L150-4070502400000	
	Test voltage (V)		27 Vdc	—
	Test current (mA)		240mA	—
	Test frequency (Hz)		--	—
	Ambient, t(°C)		25°C	—
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	—
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :	—
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	—
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	4180	
x/y colour coordinates			0,3715/ 0,3664	
Blue light hazard radiance	L_B	$W/(m^2 \cdot sr^1)$	1,70E+04	@11mrad
Blue light hazard irradiance	E_B	W/m^2	--	
Luminance	L	cd/m^2	2,07E+07	@11mrad
Illuminance	E	lx	4,09E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 1220 lx Dmin= 366 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire	
	Model number		L150-4070502400000	
	Test voltage (V)		--	--
	Test current (mA)		180mA	--
	Test frequency (Hz)		--	--
	Ambient, t(°C)		25°C	--
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	--
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :	--
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	--
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	4162	
x/y colour coordinates			0,3726/ 0,3683	
Blue light hazard radiance	L_B	$W/(m^2 \cdot sr^1)$	1,33E+04	@11mrad
Blue light hazard irradiance	E_B	W/m^2	--	
Luminance	L	cd/m^2	1,94E+07	@11mrad
Illuminance	E	lx	4,06E+03	
Supplementary information: Per IEC/TR 62778:2014 Ethr= 1461 lx Dmin= 333 mm				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire	
	Model number		L150-4070502400000	
	Test voltage (V)		--	--
	Test current (mA)		120mA	--
	Test frequency (Hz)		--	--
	Ambient, t(°C)		25°C	--
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	--
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :	--
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	--
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	4142	
x/y colour coordinates			0,3738/ 0,3705	
Blue light hazard radiance	L_B	$W/(m^2 \cdot sr^1)$	9,04E+03	@11mrad
Blue light hazard irradiance	E_B	W/m^2	--	
Luminance	L	cd/m^2	1,38E+07	@11mrad
Illuminance	E	lx	2,87E+03	
Supplementary information: N/A				

IEC TR 62778				
Clause	Requirement + Test		Result - Remark	Verdict
	TABLE:Spectroradiometric measurement			
	Measurement performed on:		<input checked="" type="checkbox"/> LED package <input type="checkbox"/> LED module <input type="checkbox"/> Lamp <input type="checkbox"/> Luminaire	
	Model number		L150-4070502400000	
	Test voltage (V)		--	--
	Test current (mA)		60mA	--
	Test frequency (Hz)		--	--
	Ambient, t(°C)		25°C	--
	Measurement distance		<input checked="" type="checkbox"/> 20 cm <input type="checkbox"/> ... cm	--
	Source size		<input checked="" type="checkbox"/> Non-small <input type="checkbox"/> Small :	--
	Field of view		<input type="checkbox"/> 100 mrad <input checked="" type="checkbox"/> 11 mrad <input type="checkbox"/> 1,7 mrad (for small sources)	--
Item	Symb ol	Units	Result	Remark
Correlated colour temperature	CCT	K	4128	
x/y colour coordinates			0,3750/ 0,3733	
Blue light hazard radiance	L_B	$W/(m^2 \cdot sr^1)$	4,62E+03	@11mrad
Blue light hazard irradiance	E_B	W/m^2	--	
Luminance	L	cd/m^2	7,31E+06	@11mrad
Illuminance	E	lx	1,53E+03	
Supplementary information: N/A				

IEC TR 62778			
Clause	Requirement + Test	Result - Remark	Verdict
TABLE: Angular light distribution			N/A

List of test equipment used:

A completed list of used test equipment shall be provided in the Test Reports when a Manufacturer Testing Laboratory according to CTF stage 1 or CTF stage 2 procedure has been used.

Note: This page may be removed when CTF stage 1 CTF stage 2 are not used. See also clause 4.8 in OD 2020 for more details.

Clause	Measurement / testing	Testing / measuring equipment / material used, (Equipment ID)	Range used	Last Calibration date	Calibration due date
7	Irradiance measurements Radiance measurements	IDR 300 Monochromator (SH 344)	200-3000nm	/	/
7	Radiance measurements	S009 Telescope (SH 345)	300-1400nm	/	/
7	Radiance measurements	SRS 12 Radiance Standard (SH 348)	300-1400nm	2021/2/25	2022/2/24
7	Irradiance measurements	CL6 Spectral irradiance standard (SH 350)	300-3000nm	2021/2/25	2022/2/24
7	Irradiance measurements	CL7 Spectral irradiance standard (SH 351)	200-400nm	2021/2/25	2022/2/24
7	Irradiance measurements	Photometric detector head (SH 359)	380nm-800nm	2021/2/26	2022/2/25
7	Irradiance measurements Radiance measurements	Wattmeter (SH030)	500V,40A	2020/10/10	2021/10/10

Appendix 1: Photo Documentation



L150-5770502400000



L150-5070502400000



L150-4070502400000

Appendix 2: Model List:




Part number submitted for type testing as following:

Part number	CCT (K)	CRI	Max Voltage(V)	Max Current (mA)
L150-5770502400000	5700	70	26,5	240

L150-5770502400000, with ANSI bin 5700K, is part of the LUXEON 5050 product family. The sample measured, L150-5770502400000 has the highest typical flux, highest typical device luminance level and highest CCT within the listed LUXEON 5050 product family. The present classification is thus valid (worst case) for all LUXEON 5050 with part number L150-AABB50CCxxxx where AA represents nominal ANSI CCT bins could be equal to 5700K or lower, BB represents CRI could be HG and from 70 to 90 (see TR IEC62778). CC represents voltage, could be 6V and 24V. Note that for 6V samples, the current is 4 times as much as that of 24V samples for same flux output and thereby the same risk. See the appendix below for an explanation of the type designation.

Part number	Designates nominal ANSI CCT /CCT (K)	designates minimum CRI	Max Voltage(V)	Max Current (mA)
L150-AABB5024XXXXX	AA	BB	26,5	240
L150-AABB5006XXXXX	AA	BB	6,6	800
L150-AABB50CCXXXXX Where				
AA - designates nominal ANSI CCT (27=2700K, 30=3000K, 35=3500K, 40=4000K, 50=5000K, 57=5700K) BB - designates minimum CRI or high Gamut (70=70CRI, 80=80CRI, 90=90CRI, HG=high gamut) CC - designates voltage (06V=6V and 24V=24V) XXXXX - reserved for further customization of product specification				

Appendix 3: Relative Spectrum Of Tested Sample(s)

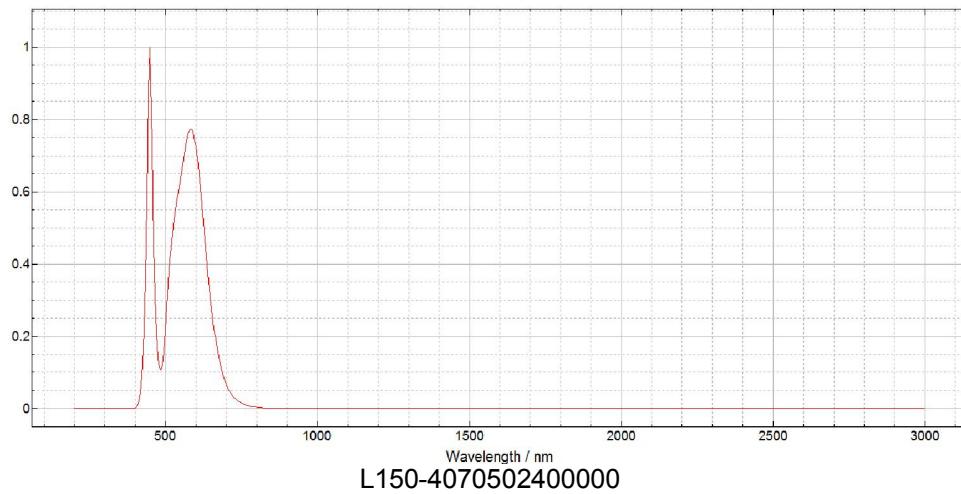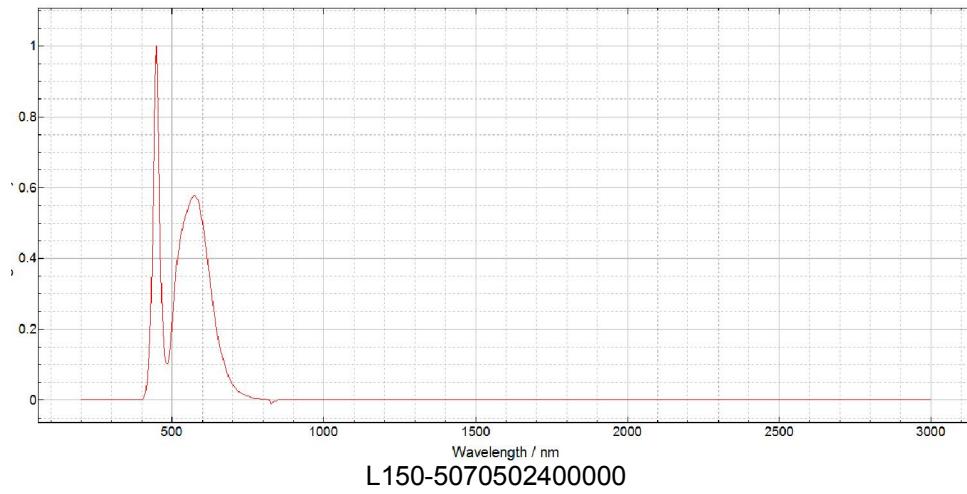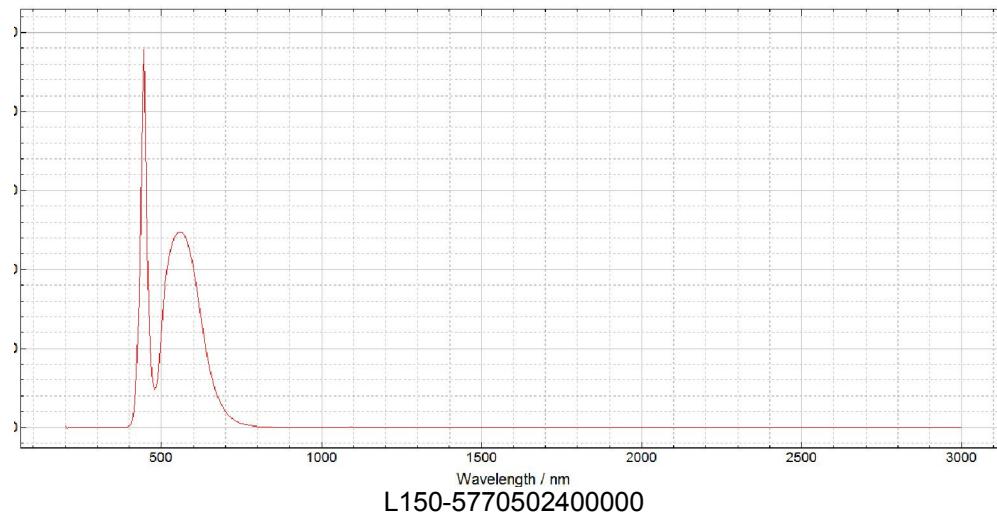

Appendix 4: Table 6.1 Based On IEC 62471:2006

DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 240mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	
Risk	Action spectrum	Symbol	Units	Emission Measurement				
				Exempt		Low risk		Mod risk
				Limit	Result	Limit	Result	Limit
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	7,76E+02	10000	2,45E+04	4000000
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	2,87E+05	$28000/\alpha$		$71000/\alpha$
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,04	570		3200

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 180mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	5,71E+02	10000	1,80E+04	4000000	2,89E+04
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	2,15E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,03	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 120mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	3,95E+02	10000	1,25E+04	4000000	1,99E+04
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	1,48E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,02	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 60mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	2,03E+02	10000	6,40E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	7,70E+04	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,01	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 240mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	4,46E+02	10000	2,20E+04	4000000	3,30E+04
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	2,65E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,09	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 180mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	3,54E+02	10000	1,73E+04	4000000	3,17E+04
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	2,09E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,09	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 120mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	2,45E+02	10000	1,20E+04	4000000	2,39E+04
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	1,46E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,08	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 60mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$W \cdot m^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,27E+02	10000	6,18E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	7,57E+04	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,08	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 240mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	3,73E+02	10000	1,70E+04	4000000	3,26E+04
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	2,19E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,07	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 180mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	2,91E+02	10000	1,33E+04	4000000	2,54E+04
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	1,72E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,06	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 120mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	2,00E+02	10000	9,04E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	1,17E+05	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,04	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 60mA, Angular subtense of the apparent source α : 25mrad

IEC 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{\text{UV}}(\lambda)$	E_s	$\text{W}\cdot\text{m}^{-2}$	0,001	0,0000	0,003		0,03	
Near UV		E_{UVA}	$\text{W}\cdot\text{m}^{-2}$	10	0,0000	33		100	
Blue light	$B(\lambda)$	L_B	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	100	1,03E+02	10000	4,62E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$\text{W}\cdot\text{m}^{-2}$	1,0*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$28000/\alpha$	6,07E+04	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$\text{W}\cdot\text{m}^{-2}\cdot\text{sr}^{-1}$	$6000/\alpha$	--	$6000/\alpha$		$6000/\alpha$	
IR radiation, eye		E_{IR}	$\text{W}\cdot\text{m}^{-2}$	100	0,05	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

Appendix 5: Table 6.1 Based On EN62471:2008, Attachment To IEC 62471 European Group Differences And National Differences
DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 240mA, Angular subtense of the apparent source α : 25mrad

EN 62471																		
Clause	Requirement + Test			Result – Remark				Verdict										
Table 6.1 Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)																		
Risk	Action spectrum	Symbol	Units	Emission Measurement														
				Exempt		Low risk		Mod risk										
				Limit	Result	Limit	Result	Limit	Result									
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--									
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--									
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	7,76E+02	10000	2,45E+04	4000000	3,97E+04									
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400										
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	2,87E+05	$28000/\alpha$		71000/ α										
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--													
				6000/ α $0,011 \leq \alpha \leq 0,1$	--													
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,04	570		3200										
* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.																		
** Involves evaluation of non-GLS source																		
NOTE The action functions: see Table 4.1 and Table 4.2 The applicable aperture diameters: see 4.2.1 The limitations for the angular subtenses: see 4.2.2 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.																		

DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 180mA, Angular subtense of the apparent source α : 25mrad

EN 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	5,71E+02	10000	1,80E+04	4000000	2,89E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	2,15E+05	$28000/\alpha$		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,03	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 120mA, Angular subtense of the apparent source α : 25mrad

EN 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	3,95E+02	10000	1,25E+04	4000000	1,99E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	1,48E+05	$28000/\alpha$		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,02	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-5770502400000, Evaluation Distance: 200mm, Test current: 60mA, Angular subtense of the apparent source α : 25mrad

EN 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Table 6.1 Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	2,03E+02	10000	6,40E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	7,70E+04	$28000/\alpha$		$71000/\alpha$	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,01	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2
 The applicable aperture diameters: see 4.2.1
 The limitations for the angular subtenses: see 4.2.2
 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 240mA, Angular subtense of the apparent source α : 25mrad

EN 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	4,46E+02	10000	2,20E+04	4000000	3,30E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	2,65E+05	$28000/\alpha$		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,09	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 180mA, Angular subtense of the apparent source α : 25mrad

EN 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Table 6.1 Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	3,54E+02	10000	1,73E+04	4000000	3,17E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	$28000/\alpha$	2,09E+05	$28000/\alpha$		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,09	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.
 ** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2
 The applicable aperture diameters: see 4.2.1
 The limitations for the angular subtenses: see 4.2.2
 The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 120mA, Angular subtense of the apparent source α : 25mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	2,45E+02	10000	1,20E+04	4000000	2,39E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	1,46E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,08	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-5070502400000, Evaluation Distance: 200mm, Test current: 60mA, Angular subtense of the apparent source α : 25mrad

EN 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Table 6.1 Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,27E+02	10000	6,18E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	7,57E+04	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,08	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 240mA, Angular subtense of the apparent source α : 25mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	

Table 6.1 Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	3,73E+02	10000	1,70E+04	4000000	3,26E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	2,19E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,07	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 180mA, Angular subtense of the apparent source α : 25mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	2,91E+02	10000	1,33E+04	4000000	2,54E+04
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	1,72E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,06	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 120mA, Angular subtense of the apparent source α : 25mrad

EN 62471									
Clause	Requirement + Test			Result – Remark				Verdict	

Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	2,00E+02	10000	9,04E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	1,17E+05	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,04	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

DUT: L150-4070502400000, Evaluation Distance: 200mm, Test current: 60mA, Angular subtense of the apparent source α : 25mrad

EN 62471								
Clause	Requirement + Test			Result – Remark			Verdict	

Table 6.1 Emission limits for risk groups of continuous wave lamps (based on EU Directive 2006/25/EC)									
Risk	Action spectrum	Symbol	Units	Emission Measurement					
				Exempt		Low risk		Mod risk	
				Limit	Result	Limit	Result	Limit	Result
Actinic UV	$S_{UV}(\lambda)$	E_s	$W \cdot m^{-2}$	0,001	0,0000	--	--	--	--
Near UV		E_{UVA}	$W \cdot m^{-2}$	0,33	0,0000	--	--	--	--
Blue light	$B(\lambda)$	L_B	$W \cdot m^{-2} \cdot sr^{-1}$	100	1,03E+02	10000	4,62E+03	4000000	
Blue light, small source	$B(\lambda)$	E_B	$W \cdot m^{-2}$	0,01*	--	1,0		400	
Retinal thermal	$R(\lambda)$	L_R	$W \cdot m^{-2} \cdot sr^{-1}$	28000/ α	6,07E+04	28000/ α		71000/ α	
Retinal thermal, weak visual stimulus**	$R(\lambda)$	L_{IR}	$W \cdot m^{-2} \cdot sr^{-1}$	545000 $0,0017 \leq \alpha \leq 0,011$	--				
				6000/ α $0,011 \leq \alpha \leq 0,1$	--				
IR radiation, eye		E_{IR}	$W \cdot m^{-2}$	100	0,05	570		3200	

* Small source defined as one with $\alpha < 0,011$ radian. Averaging field of view at 10000 s is 0,1 radian.

** Involves evaluation of non-GLS source

NOTE The action functions: see Table 4.1 and Table 4.2

The applicable aperture diameters: see 4.2.1

The limitations for the angular subtenses: see 4.2.2

The related measurement condition 5.2.3 and the range of acceptance angles: see Table 5.5.

Appendix 6: Blue Light Hazard-Forward Current Relationship (Non-mandatory Information)


Threshold drive current for RG1-RG2 boundary limit

	Threshold drive current (mA)	Nominal CCT			
		≤3000K	≤4000K	≤5000K	≤5700K
L150-xxyy5024zzzz (24V, 8 die in series)	96 mA	RG1 unlimited	RG1 unlimited	RG1 unlimited	RG1 unlimited
	99 mA	RG1 unlimited	RG1 unlimited	RG1 unlimited	RG2
	131 mA	RG1 unlimited	RG1 unlimited	RG2	RG2
L150-xxyy5006zzzz (6V, 2 die in series x 4 parallel strings)	384 mA	RG1 unlimited	RG1 unlimited	RG1 unlimited	RG1 unlimited
	396 mA	RG1 unlimited	RG1 unlimited	RG1 unlimited	RG2
	524 mA	RG1 unlimited	RG1 unlimited	RG2	RG2


where xx = nominal CCT, yy = min CRI, zzzzz for marketing use

The diagram below shows the different blue light hazards against different forward currents. It is additional information for reference only.

L150-5770502400000

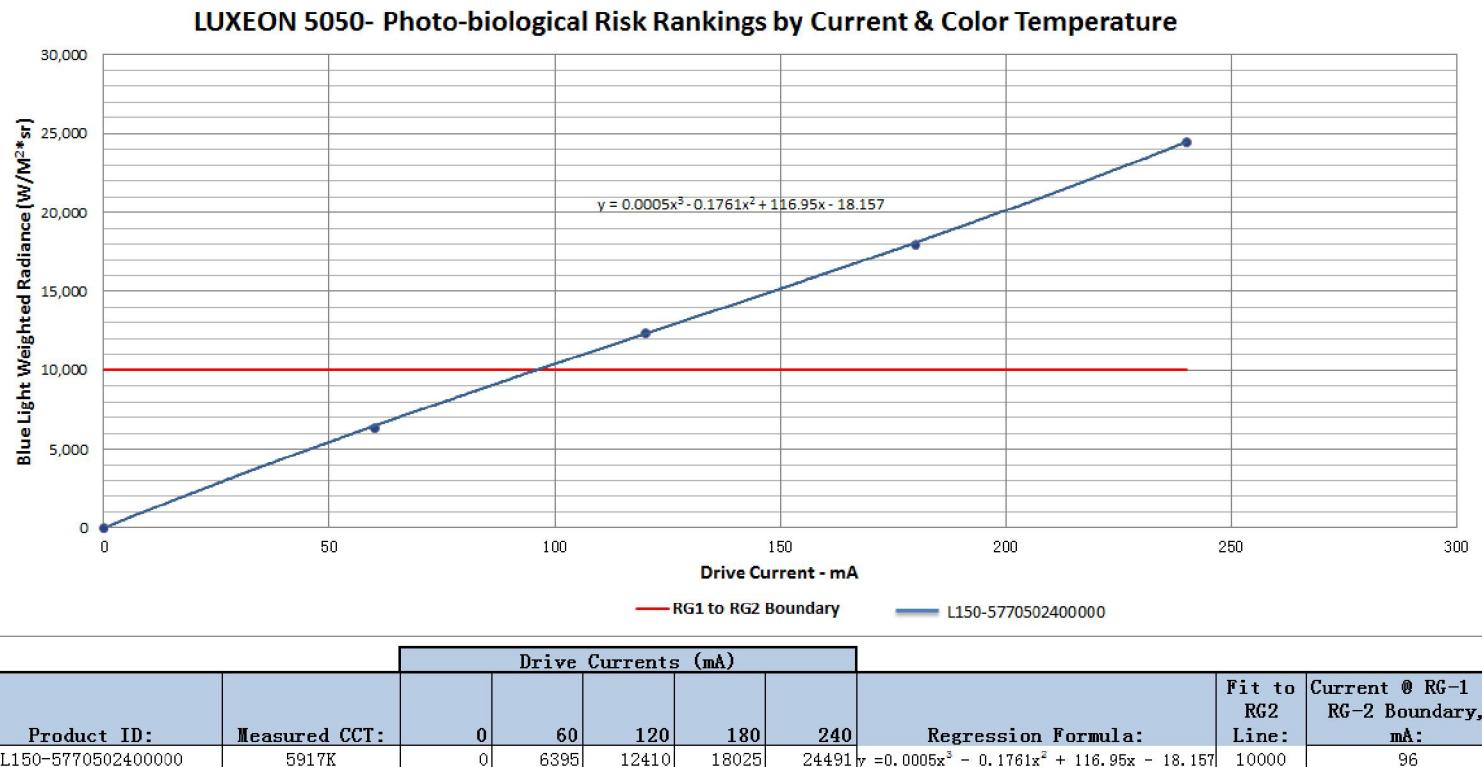


L150-5070502400000

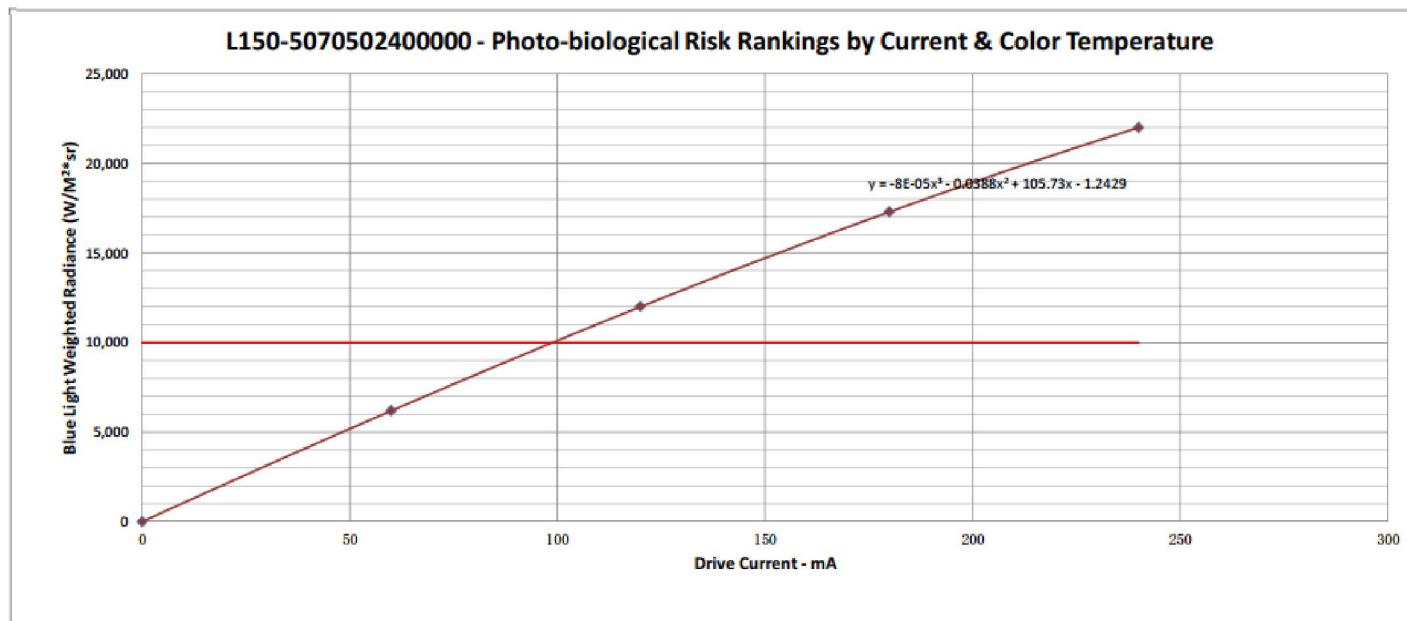

CCT Group:	Product ID:	Measured CCT:	Drive Currents (mA)					Regression Formula:	Fit to RG2 Line:	Current @ RG-1 to RG-2 Boundary, mA:
			0	60	120	180	240			
White	L150-5070502400000	5214K	0	6180	11991	17281	21985	$y = -8E-05x^3 - 0.0388x^2 + 105.73x - 1.2429$	10008	99

L150-4070502400000

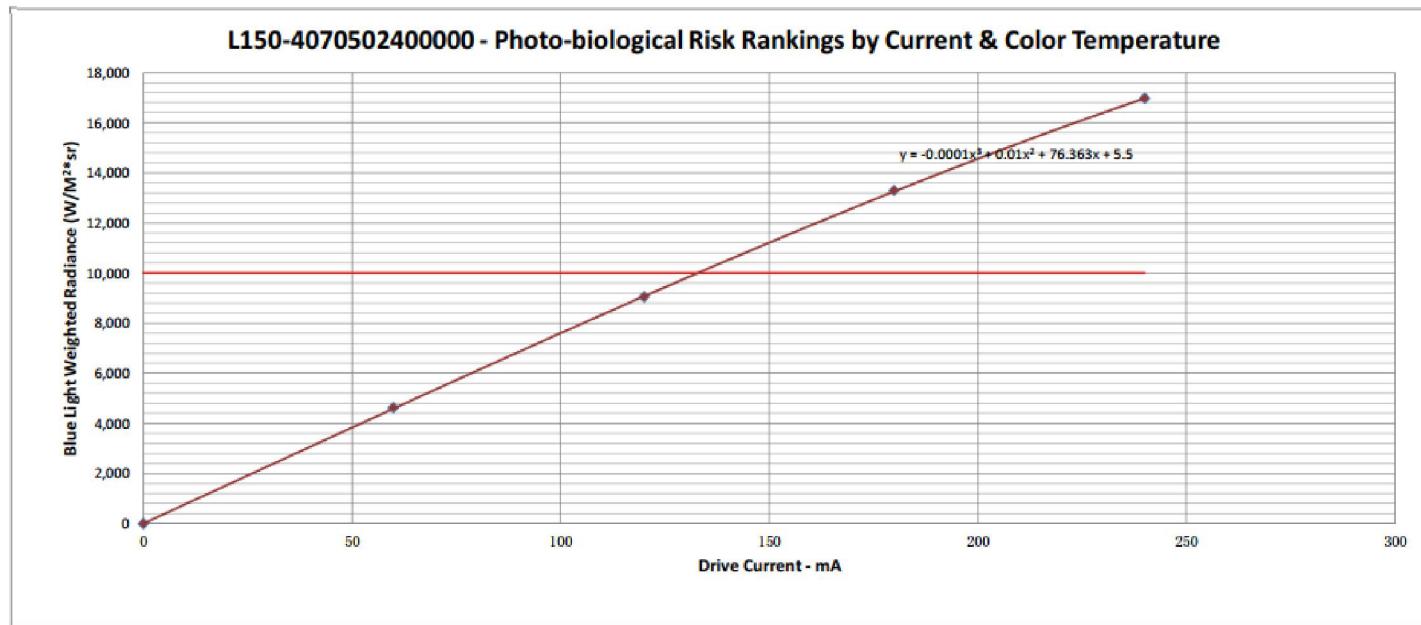

CCT Group:	Product ID:	Measured CCT:	Drive Currents (mA)						Regression Formula:	Fit to RG2 Line:	Current @ RG-1 to RG-2 Boundary, mA:
			0	60	120	180	240				
Warm White	L150-4070502400000	4180	0	4615	9038	13280	16967	$y = -1E-04x^3 + 0.01x^2 + 76.363x + 5.5$	9956	131	

-----The End-----